

TECHNICAL DATA: TTR 4400 HST



THE 30 SERIES

Chassis	ACTIO™ Full chassis with oscillation • RGS™ Reversibility • Steering wheels • Equal wheel drive			
Engine Type	Direct-injection diesel			
	Emissions regulations: Stage IIIA	N° cylinders: 3 – Natural/internal induction		
	Displacement: cc. 1642	Power kW/HP (97/68/CE): 28/38		
	Maximum engine revs: 3000	Torque max (Nm/revs) 113/1200		
	Cooling: water	Tank capacity (litres) 30		
Transmission	Hydrostatic with 3 speed range – Stepless speed variator from 0 to 30 Km/h			
PTO	Rear, 540/1000 rpm			
Shaft	Profile 1" 3/8 with 6 splines with facilitated engagement			
Transmission clutch	Hydraulic control			
Drive disengagement	Mechanical rear control			
Rear hydraulic lift	3-point hitch - Capacity (Kg): 910 Valve to control power lift descent speed			
Operating Pressure (bar)	160			
Steering	With 1 double-acting piston and connecting bar with "Load sensing" system			
Brakes	Standard: rear hydraulic drum brakes Emergency and parking brakes: acting on rear brakes			
Platform	Mounted on Silent Block			
Tyres	7.50 16	6.50x16	240/70 R15 Garden	29x12.50-15 Terra • Green • Xtra-Traction
Weight in order of speed (Kg)	With rollbar: 1275		With cab: 1440	

Standard Features


- RGS™ reversible control tower • Handles on mudguards • Flexible widenings for rear and front mudguards • Rear and front mechanical-control differential lock • 1-pump hydraulic system for hydrostatic transmission • Rear hydraulic system with 4 levers: 3 double-acting distributors with floating position + 1 double-acting distributor with floating position replicated at the front (tot. 8 quick couplings) • Fix type lifting arms and coupling balls, cat. 1-1N • Adjustable padded seat with safety belts • Rear partially foldable roll bar • Adjustable rims • Rear tow hitch • Front tow hitch • Multifunctional digital instrument tachometer/revolution counter, Km/h and PTO • Battery • 12V 7-pole / single-pole outlet • Safety starting device on the seat, the clutch and the PTO • "Speed-fix" system: to establish the speed of the working vehicle

Optional Features

- Cab with air conditioning system suspended on Silent-Block • Power lift and hydraulic outlets controlled by ON/OFF Joystick • Front hydraulic power lift • Front PTO 1000 rpm • Rear double-acting power lift • Couplers for top fitting equipment with front third hitch • Rear short lifting arms • Integral braking fitted to all four wheels • Working light • Containment sides for standard seat • Grammer fabric cover seat with pneumatic suspension (available with cabin) • Pair of front/rear wheel ballasts • RT 1500 HDS: front-mounted rotary mower with suction turbine, cutting width 150 cm • CT 1000: rotary mower collector, holding capacity 1000 litres



DIMENSIONS

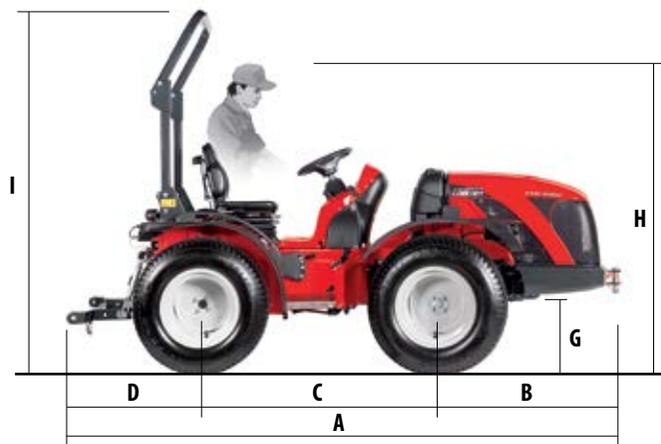

	7.50-16	6.50-16	29x12.50-15 Terra STG	29x12.50-15 Green	240/70-15 Garden
E	210	180	310	310	235

Wheels

Dimensions (mm)

Front	Rear	A	B	C	D	F	G	H**	I	L*	M	N*	O
7.50-16	7.50-16	3010	925	1360	725	2096	261	1745	2036	1198	990	1191	983
6.50-16	6.50-16	3010	925	1360	725	2081	246	1730	2021	1123	940	1131	948
29x12.50-15	29x12.50-15 Terra STG	3010	925	1360	725	2068	233	1715	2008	1375	1070	1357	1052
29x12.50-15	29x12.50-15 Green	3010	925	1360	725	2068	233	1715	2008	1375	1070	1357	1052
240/70-15	240/70-15 Garden	3010	925	1360	725	2052	217	1700	1992	1217	987	1176	946

*Min. external width

**Height calculated with the operator of average height sitting (cm 175)

The description and illustrations in this brochure are provided simply for information purposes; they are not binding and may be varied at any time without notice.

